


**NEW**  
Level VI

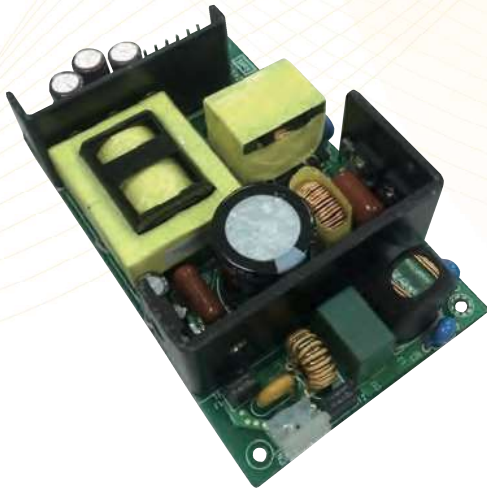

# IT / Medical Open Frame Power Supply 150 Watt Series

mO150 - 10XX

O / P Voltage ←

### Green Mode

Meet CEC, DoE Level VI, ErP Stage 2  
No Load Power Consumption Less Than 0.15W

### Features :

- ANSI/AAMI/IEC/EN ES60601-1:2012 (60601 edition 3.1)
- Means of Protection: 2 X MOPP
- Touch Current : < 100µA
- Meet UL60950-1 , EN60950
- 100-240VAC Universal Input
- Single Output to 150W
- Regulated Output With Low Ripple Noise
- Modified and Custom Design Available
- 2 Years Warranty

Model	O/P Voltage	O/P Current	Watt
mO150-1012	12.0V	12.50A	144W
mO150-1024	24.0V	6.25A	150W
mO150-1030	30.0V	5.00A	150W
mO150-1048	48.0V	3.12A	150W

Input	
Voltage	100-240VAC
Line Frequency	50-60Hz
Current	2.0-0.8A Max.
Protection	Internal Primary Current Fuse

### Output

Load Regulation	±5% ( Typical )
Ripple	2% Vp-p Max. for Output Voltage@ Full Load
Transient Response	0.5mS for 50% Load Change Typical
Hold-up Time	10mS @ Full Load
Protection	Short Circuit Protection / Over Voltage Protection / Over Current Protection / Over Temperature Protection

### Safety Approvals

CB / UL / T-mark(TUV)

### Electrical

Topology	LLC
Dielectric Withstand	4000VAC Primary - Secondary
Touch Current	< 100µA
MTBF	300,000 Calculated Hours at 25°C , by Telcordia SR-332

### Environmental

Operating Temperature	0 to + 50°C
Storage Temperature	-20 to + 80°C
Relative Humidity	Operating : 20 to 80% RH Storage : 10 to 90% RH
Cooling	Natural Convection Cooling

### Mechanical

Dimension	L 127 × W 76 × H 35 (mm)( Ref. ) 5" x 3" x 1.4" (inch)
Weight	320 g ( Ref. )



CB RoHS