

YSDN480 SERIES 480W



eUrasia Power's metal case power family designed with slim housing and for full range AC input from 90V AC TO 264V AC. The series are single phase PSU, providing adjustable DC output voltage. They have high efficiency and operate in wide temperature range. The series can widely used for industrial automation & control systems, varied equipments etc.



Features

- DC** DC O/P Voltage Adjustable
- AC** Universal AC Input 90-264V
- Shield** Protection: Short Circuit/Overload /Over Voltage/Over Temperature
- Waves** Free Air Convection Design
- DIN** Installation: DIN Rail TS-35/7.5 & 15
- Shield** With build-in active PFC function
- 3** Three Years Warranty

Model Information

Yingjiao Part number	DC VOLTAGE	RATED CURRENT (Max.)	RATED POWER	VOLTAGE ADJ. RANGE
YSDN480-24020000	24V	20A	480W	24-28V
YSDN480-24020000	48V	10A	480W	48-55V

Input

VOLTAGE RANGE	90 ~ 264VAC, 127 ~ 370VDC [DC input by connecting AC/L(+),AC/N(-)]	
FREQUENCY RANGE	50/60Hz	
POWER FACTOR (Typ.)	>0.98/115VAC	at full load
	> 0.94/230VAC	at full load
EFFICIENCY (Typ.)	92%	
AC CURRENT (Typ.)	4.8A/115VAC 2.4A/230VAC	
INRUSH CURRENT (Typ.)	20A/115VAC 35A/230VAC	
LEAKAGE CURRENT	<2mA / 240VAC	

Output

RIPPLE & NOISE (max.)	150mVp-p	YSDN480-24020000
	160mVp-p	YSDN480-48010000
VOLTAGE TOLERANCE	± 2.0%	
LINE REGULATION	± 0.5%	
LOAD REGULATION	± 1.0%	
SETUP, RISE TIME	1500ms, 100ms/230VAC	at full load
	3000ms, 100ms/115VAC	at full load
HOLD UP TIME (Typ.)	16ms/230VAC	at full load
	16ms/115VAC	at full load

Protection

OVER LOAD	105 ~ 130% rated output power, recovers automatically after fault condition removed
OVER VOLTAGE	29 ~ 33V YSDN480-24020000 56 ~ 65V YSDN480-48010000 Protection type : Shut down o/p voltage with auto-recovery
OVER TEMPERATURE	Protection type : Shut down o/p temperature with auto-recovery

Environment

WORKING TEMP.	-20 ~ +70 °C (Refer to "Derating Curve")
WORKING HUMIDITY	20 ~ 95% RH non-condensing
STORAGE TEMP.	-40 ~ +85 °C , 10 ~ 95% RH
STORAGE HUMIDITY	10 ~ 95% RH
MTBF	200,000 Hours Minimum at Full Load at 25 °C Ambient

SAFETY & EMC (Note 4)

SAFETY STANDARDS	UL508, BS/EN62368-1
WITHSTAND VOLTAGE	I/P-O/P:3KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC
ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:>100M Ohms / 500VDC / 25 °C / 70% RH
EMC EMISSION	Compliance to BS EN/EN55032 , BS EN/EN61000-3-2,-3
EMC IMMUNITY	Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11, BS EN/EN55024, BS EN/EN61000-6-2 (BS EN/EN50082-2), BS EN/EN61204-3, heavy industry level

Note

- 1.All parameters NOT specially mentioned at 230VAC input, rated load and 25 °C of ambient temperature.
- 2.Ripple&noise are measured from peak to peak with band width limit of 20MHz(0.1uF and 47uF/50V parallel capacitor under DC output full load,AC nominal input 25 °C ambient temperature).
- 3.Installation clearances: top with 40mm, bottom with 20mm, left and right with 5mm. Increase the space to 10-15mm when the adjacent device is heat source.
- 4.Derating may be needed under low input voltage. Please check the derating curve for more details.
- 5.Efficiency test after 30 minutes of burn-in.
- 6.The ambient temperature derating of 3.5 °C /1000m for operating altitude higher than 2000m(6500ft).


Dimensions & Weight

Length:	85.5mm / 3.37in
Width:	125mm / 4.92in
Height:	129mm / 5.08in
Weight:	1.5kg

Packing

Carton Size:	49 x 34.5 x 16.5 CM 19.29 x 13.58 x 6.5 in
Master Carton Quantities:	8pcs / Carton

Mechanical Specification

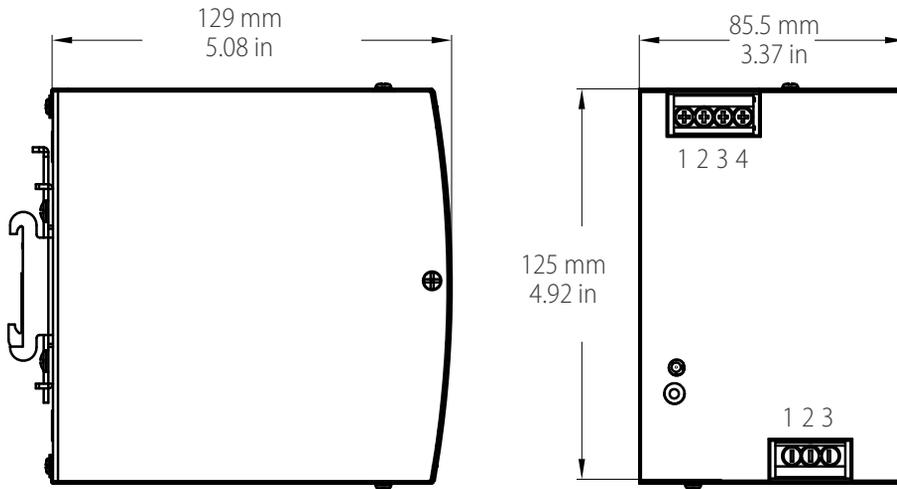


Input

Pin No.	Description
1	FG ⊕
2	AC/N or DC -
3	AC/L or DC +


Output

Pin No.	Description
1,2	DC OUTPUT-V
3,4	DC OUTPUT+V

Block Diagram

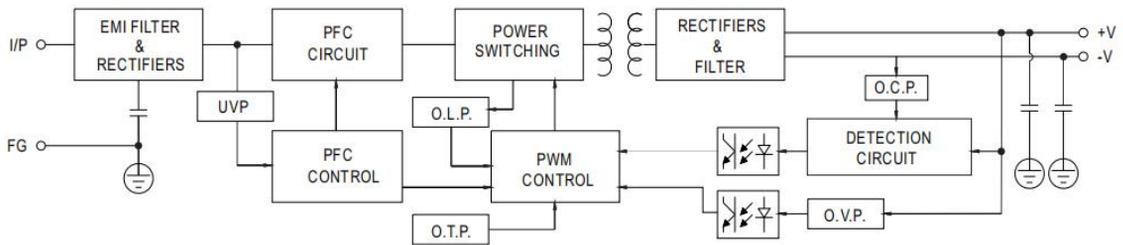

Deduction Curve And Temperature

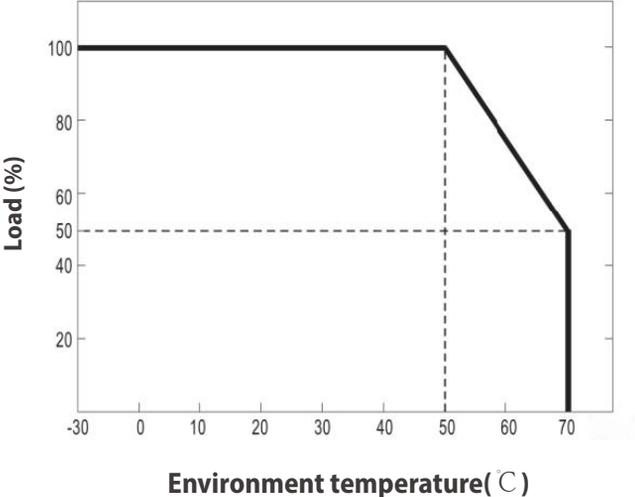

Minus Output And Input Voltage Curves

